



Exterior Lights UK Ltd



The Hastings 250W is an IP66 robust and durable LED Flood Light with high performance LEDs and driver.

The Hastings can be manufactured with Symmetrical or Asymmetrical optics and adjustable modules to provide maximum flexibility on each project.

A modern future proof design that can provide excellent energy savings over traditional technology.

Hastings 250W - LED Flood Light

Flood Lighting

Features


- LED rating 37,500lm
- Luminaire flux 34,125lm (symmetrical).
- Luminaire flux 32,250lm (asymmetrical).
- -20 to +40 operating temperature.
- LED life span > 50,000hrs.
- Universal bracket for T/Bar bracket and wall fixing.
- Aluminium body with stainless steels fixings.
- RAL9006 - Black.
- IP66 / IKo8 Rated.
- 4mm thick toughened glass panel.
- Fixing hole for 20mm bolt for added strength.

Applications

- Security
- Sport
- Car Parks
- Perimeter Fence
- Canopy
- Facade

www.exteriorlights.co.uk

01689 606 342

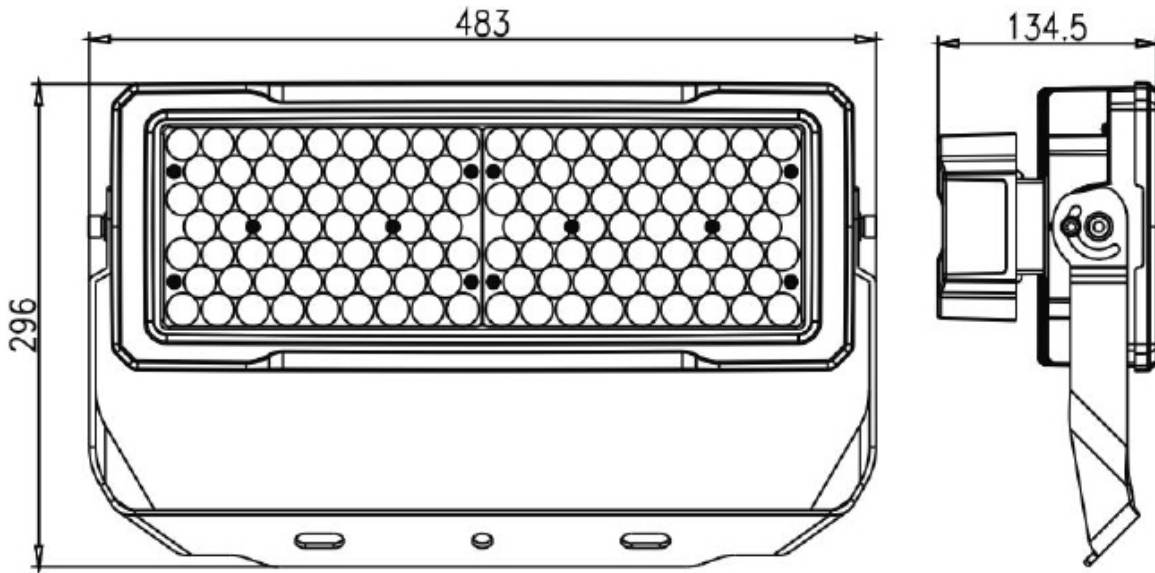


Specifications


Hastings 250W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour
Standard												
HU250-AN-00B-1	Hastings-250W-LED-AC-4K-Std-Black-SYM-Optic 1	LED	37,500	250	NW	4K	Ra>70	110-240	34,125	137	7.0	Black
HU250-AN-00B-2	Hastings-250W-LED-AC-4K-Std-Black-A/SYM-Optic 2	LED	37,500	250	NW	4K	Ra>70	110-240	32,250	129	7.0	Black

Legend: **Std** = Standard. **4K** = Neutral White (4000K). **NW** = Neutral White. **SYM** = Symmetrical. **A/SYM** = Asymmetrical.

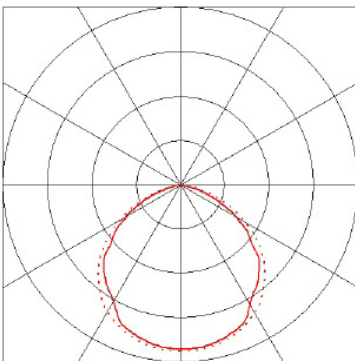

Optic 1: Symmetric 120° beam.

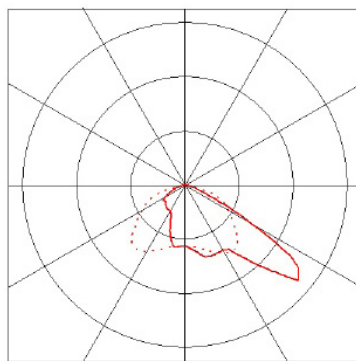

Optic 2: Asymmetrical forward-throw.