



## Exterior Lights UK Ltd

The Orpington is a modern and stylish IP55 rated stainless steel LED Bollard.

Manufactured from 316 Stainless Steel, featuring aluminium louvres for optimum performance and a transparent strong UV stabilised polycarbonate diffuser.

Options available include bolt-on root, 180° spill shield and 3hr emergency.



# Orpington 40W - LED Bollard

## Bollard Lighting



## Features


- LED rating 5,168lm (4000K & 6000K).
- LED rating 4,372lm (3000K).
- Luminaire flux 3,669lm (4000K & 6000K).
- Luminaire flux 3,104lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature (Emergency 0 to +40°C).
- LED life span > 100,000hrs.
- Osram LED and Osram Driver.
- Easy access to LED and Driver via a removable head.
- Aluminium louvres for optimum performance and minimal upward light.
- Tamper proof fixings for increased vandal resistance.
- Marine Grade 316.

## Applications

- Prestigious Grounds
- Walk Ways
- Car Parks
- Security
- Parks and Gardens
- Amenity Areas

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

**01689 606 342**

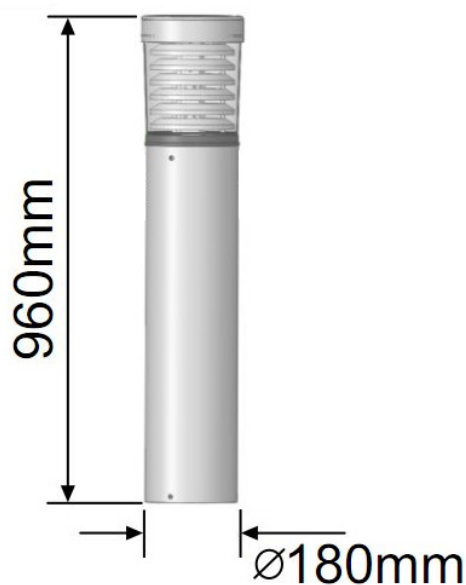

## Specifications

### Orpington 40W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour
<b>Standard</b>													
AB40-A7C-00-SS316	Orpington-40W-LED-AC-6K-Std-SS316	LED	5,168	40	CW	6K	Ra>70	220-240	700	3,669	92	8.5	SS316
AB40-A7N-00-SS316	Orpington-40W-LED-AC-4K-Std-SS316	LED	5,168	40	NW	4K	Ra>70	220-240	700	3,669	92	8.5	SS316
AB40-A7W-00-SS316	Orpington-40W-LED-AC-3K-Std-SS316	LED	4,372	40	WW	3K	Ra>80	220-240	700	3,104	78	8.5	SS316
<b>Standard - Emergency</b>													
AB40-A7C-01-SS316	Orpington-40W-LED-AC-6K-Std-E3-SS316	LED	5,168	40	CW	6K	Ra>70	220-240	700	3,669	92	9.5	SS316
AB40-A7N-01-SS316	Orpington-40W-LED-AC-4K-Std-E3-SS316	LED	5,168	40	NW	4K	Ra>70	220-240	700	3,669	92	9.5	SS316
AB40-A7W-01-SS316	Orpington-40W-LED-AC-3K-Std-E3-SS316	LED	4,372	40	WW	3K	Ra>80	220-240	700	3,104	78	9.5	SS316
<b>Dali</b>													
AB40-A7C-20-SS316	Orpington-40W-LED-AC-6K-Dali-SS316	LED	5,168	40	CW	6K	Ra>70	220-240	700	3,669	92	8.5	SS316
AB40-A7N-20-SS316	Orpington-40W-LED-AC-4K-Dali-SS316	LED	5,168	40	NW	4K	Ra>70	220-240	700	3,669	92	8.5	SS316
AB40-A7W-20-SS316	Orpington-40W-LED-AC-3K-Dali-SS316	LED	4,372	40	WW	3K	Ra>80	220-240	700	3,104	78	8.5	SS316
<b>Dali - Emergency</b>													
AB40-A7C-21-SS316	Orpington-40W-LED-AC-6K-Dali-E3-SS316	LED	5,168	40	CW	6K	Ra>70	220-240	700	3,669	92	9.5	SS316
AB40-A7N-21-SS316	Orpington-40W-LED-AC-4K-Dali-E3-SS316	LED	5,168	40	NW	4K	Ra>70	220-240	700	3,669	92	9.5	SS316
AB40-A7W-21-SS316	Orpington-40W-LED-AC-3K-Dali-E3-SS316	LED	4,372	40	WW	3K	Ra>80	220-240	700	3,104	78	9.5	SS316

Legend: **Std** = Standard. **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk

01689 606 342



V220615