



The Pluckley is a popular IP65 rated LED translucent Post Top with a modern and stylish feel.

Manufactured with a beautiful aluminium louvre stack to ensure a controlled distribution of light and minimise glare.

Note: Available with a coated upper canopy
- See Jaguar Range.

Options include Mini Photocell, Dali, spigot size and 180° Spill Shield.

Pluckley 45W - LED Globe

Amenity Lighting



Features


- LED rating 5,880lm (4000K & 6000K).
- LED rating 4,974lm (3000K).
- Luminaire flux 5,127lm (4000K & 6000K).
- Luminaire flux 4,338lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- Total wattage 45W.
- -20 to +40°C operating temperature.
- LED life span > 100,000hrs.
- Osram LED and Osram Driver.
- Easy access to LED and Driver via a removable head.
- Options include Mini Photocell, Dali, spigot size and 180° Spill Shield.
- Manufactured from UV stabilised polycarbonate.
- Louvres for optimum performance and minimal upward light.

Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

www.exteriorlights.co.uk

01689 606342

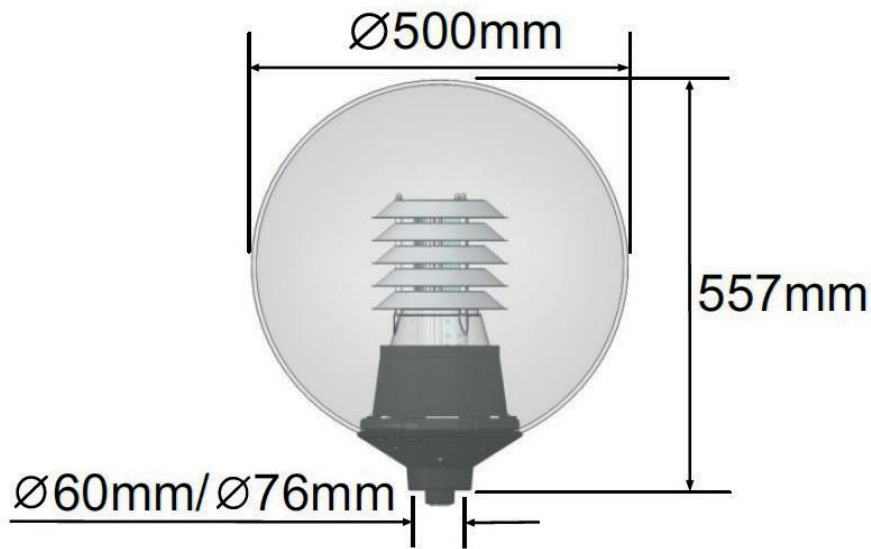

Specifications

Pluckley 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT(K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard - 76mm Spigot													
DG45-A5C-00C-76	Pluckley-45W-LED-AC-6K-Std-Clear-76mm	LED	5,880	45	6K	Ra>70	220-240	525	5,127	114	5	Clear	76
DG45-A5N-00C-76	Pluckley-45W-LED-AC-4K-Std-Clear-76mm	LED	5,880	45	4K	Ra>70	220-240	525	5,127	114	5	Clear	76
DG45-A5W-00C-76	Pluckley-45W-LED-AC-3K-Std-Clear-76mm	LED	4,974	45	3K	Ra>80	220-240	525	4,338	96	5	Clear	76
Standard - 60mm Spigot													
DG45-A5C-00C-60	Pluckley-45W-LED-AC-6K-Std-Clear-60mm	LED	5,880	45	6K	Ra>70	220-240	525	5,127	114	5	Clear	60
DG45-A5N-00C-60	Pluckley-45W-LED-AC-4K-Std-Clear-60mm	LED	5,880	45	4K	Ra>70	220-240	525	5,127	114	5	Clear	60
DG45-A5W-00C-60	Pluckley-45W-LED-AC-3K-Std-Clear-60mm	LED	4,974	45	3K	Ra>80	220-240	525	4,338	96	5	Clear	60
Standard - Mini Photocell - 76mm Spigot													
DG45-A5C-04C-76	Pluckley-45W-LED-AC-6K-Std-M/Photocell-Clear-76mm	LED	5,880	45	6K	Ra>70	220-240	525	5,127	114	5	Clear	76
DG45-A5N-04C-76	Pluckley-45W-LED-AC-4K-Std-M/Photocell-Clear-76mm	LED	5,880	45	4K	Ra>70	220-240	525	5,127	114	5	Clear	76
DG45-A5W-04C-76	Pluckley-45W-LED-AC-3K-Std-M/Photocell-Clear-76mm	LED	4,974	45	3K	Ra>80	220-240	525	4,338	96	5	Clear	76
Standard - Mini Photocell - 60mm Spigot													
DG45-A5C-04C-60	Pluckley-45W-LED-AC-6K-Std-M/Photocell-Clear-60mm	LED	5,880	45	6K	Ra>70	220-240	525	5,127	114	5	Clear	60
DG45-A5N-04C-60	Pluckley-45W-LED-AC-4K-Std-M/Photocell-Clear-60mm	LED	5,880	45	4K	Ra>70	220-240	525	5,127	114	5	Clear	60
DG45-A5W-04C-60	Pluckley-45W-LED-AC-3K-Std-M/Photocell-Clear-60mm	LED	4,974	45	3K	Ra>80	220-240	525	4,338	96	5	Clear	60

Specifications

Pluckley 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT ()	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Dali - 76mm Spigot													
DG45-A5C-20C-76	Pluckley-45W-LED-AC-6K-Dali-Clear-76mm	LED	5,880	45	6K	Ra>70	220-240	525	5,127	114	5	Clear	76
DG45-A5N-20C-76	Pluckley-45W-LED-AC-4K-Dali-Clear-76mm	LED	5,880	45	4K	Ra>70	220-240	525	5,127	114	5	Clear	76
DG45-A5W-20C-76	Pluckley-45W-LED-AC-3K-Dali-Clear-76mm	LED	4,974	45	3K	Ra>80	220-240	525	4,338	96	5	Clear	76
Dali - 60mm Spigot													
DG45-A5C-20C-60	Pluckley-45W-LED-AC-6K-Dali-Clear-60mm	LED	5,880	45	6K	Ra>70	220-240	525	5,127	114	5	Clear	60
DG45-A5N-20C-60	Pluckley-45W-LED-AC-4K-Dali-Clear-60mm	LED	5,880	45	4K	Ra>70	220-240	525	5,127	114	5	Clear	60
DG45-A5W-20C-60	Pluckley-45W-LED-AC-3K-Dali-Clear-60mm	LED	4,974	45	3K	Ra>80	220-240	525	4,338	96	5	Clear	60

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk
01689 606342

