



Exterior Lights UK Ltd



The Wadhurst 175W is a high performance IP65/IP66 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured with anti-corrosion die cast aluminium, stainless steel fixings and featuring high impact glass for additional protection.

Complete with adjustable spigot for side or column top entry, and 15M of cable for a quick installation.

Options include Nema socket, Dali Driver, LED colour temperature, and spigot size.

Wadhurst 175W - LED Street Light

Street Lighting



Features


- LED rating 27,264lm (4000K & 6000K).
- LED rating 23,065lm (3000K).
- Luminaire flux 23,992lm (4000K & 6000K).
- Luminaire flux 20,298lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 60/76mm spigot options.
- Anti-corrosion die cast aluminium.
- Corrosion resistant polyester powder coating.
- Optimised optics for high uniformity and maximum spacing's between columns.
- Future proof design.

Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

www.exteriorlights.co.uk

01689 606 342

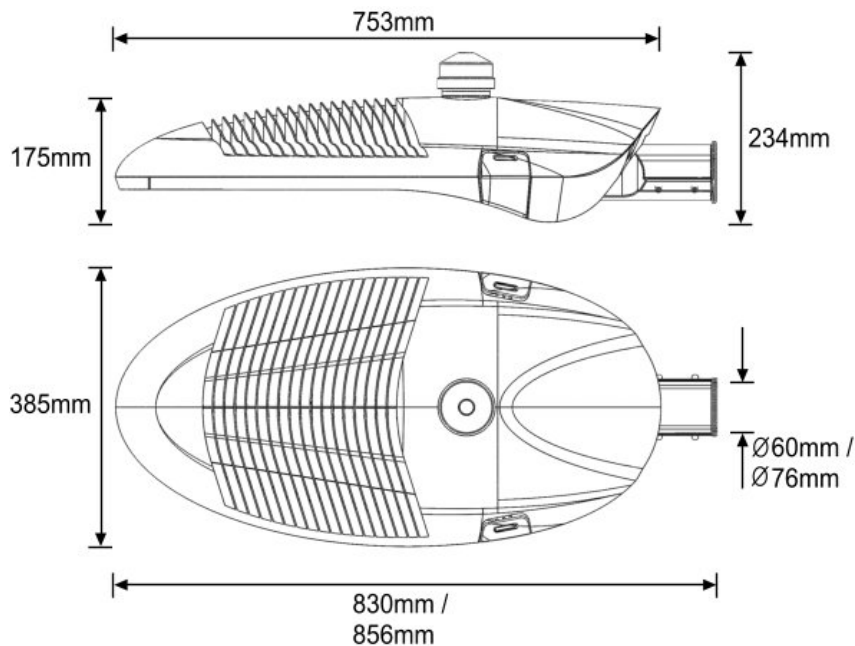

Specifications

Wadhurst 175W

Item Number	Description	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard-Grey-6K													
CQ175-A4C-00G-60	Wadhurst-175W-LED-AC-6K-Std-Grey-60mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.5	Grey	60
CQ175-A4C-00G-76	Wadhurst-175W-LED-AC-6K-Std-Grey-76mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.5	Grey	76
Standard-Grey-4K													
CQ175-A4N-00G-60	Wadhurst-175W-LED-AC-4K-Std-Grey-60mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.5	Grey	60
CQ175-A4N-00G-76	Wadhurst-175W-LED-AC-4K-Std-Grey-76mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.5	Grey	76
Standard-Grey-3K													
CQ175-A4W-00G-60	Wadhurst-175W-LED-AC-3K-Std-Grey-60mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.5	Grey	60
CQ175-A4W-00G-76	Wadhurst-175W-LED-AC-3K-Std-Grey-76mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.5	Grey	76
Standard-Grey-NemaSocket-6K													
CQ175-A4C-06G-60	Wadhurst-175W-LED-AC-6K-Std-NemaSocket-Grey-60mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.75	Grey	60
CQ175-A4C-06G-76	Wadhurst-175W-LED-AC-6K-Std-NemaSocket-Grey-76mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.75	Grey	76
Standard-Grey-NemaSocket-4K													
CQ175-A4N-06G-60	Wadhurst-175W-LED-AC-4K-Std-NemaSocket-Grey-60mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.75	Grey	60
CQ175-A4N-06G-76	Wadhurst-175W-LED-AC-4K-Std-NemaSocket-Grey-76mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.75	Grey	76
Standard-Grey-NemaSocket-3K													
CQ175-A4W-06G-60	Wadhurst-175W-LED-AC-3K-Std-NemaSocket-Grey-60mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.75	Grey	60
CQ175-A4W-06G-76	Wadhurst-175W-LED-AC-3K-Std-NemaSocket-Grey-76mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.75	Grey	76
Dali-Grey-6K													
CQ175-A4C-20G-60	Wadhurst-175W-LED-AC-6K-Dali-Grey-60mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.5	Grey	60
CQ175-A4C-20G-76	Wadhurst-175W-LED-AC-6K-Dali-Grey-76mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.5	Grey	76

Specifications

Wadhurst 175W

Item Number	Description	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Dali-Grey-4K													
CQ175-A4N-20G-60	Wadhurst-175W-LED-AC-4K-Dali-Grey-60mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.5	Grey	60
CQ175-A4N-20G-76	Wadhurst-175W-LED-AC-4K-Dali-Grey-76mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.5	Grey	76
Dali-Grey-3K													
CQ175-A4W-20G-60	Wadhurst-175W-LED-AC-3K-Dali-Grey-60mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.5	Grey	60
CQ175-A4W-20G-76	Wadhurst-175W-LED-AC-3K-Dali-Grey-76mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.5	Grey	76
Dali-Grey-NemaSocket-6K													
CQ175-A4C-26G-60	Wadhurst-175W-LED-AC-6K-Dali-NemaSocket-Grey-60mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.75	Grey	60
CQ175-A4C-26G-76	Wadhurst-175W-LED-AC-6K-Dali-NemaSocket-Grey-76mm	27,264	175	CW	6K	Ra>70	220-240	455	23,992	137	14.75	Grey	76
Dali-Grey-NemaSocket-4K													
CQ175-A4N-26G-60	Wadhurst-175W-LED-AC-4K-Dali-NemaSocket-Grey-60mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.75	Grey	60
CQ175-A4N-26G-76	Wadhurst-175W-LED-AC-4K-Dali-NemaSocket-Grey-76mm	27,264	175	NW	4K	Ra>70	220-240	455	23,992	137	14.75	Grey	76
Dali-Grey-NemaSocket-3K													
CQ175-A4W-26G-60	Wadhurst-175W-LED-AC-3K-Dali-NemaSocket-Grey-60mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.75	Grey	60
CQ175-A4W-26G-76	Wadhurst-175W-LED-AC-3K-Dali-NemaSocket-Grey-76mm	23,065	175	WW	3K	Ra>80	220-240	455	20,298	116	14.75	Grey	76

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.