





SLV THEO

outdoor wall light, QPAR51, IP44, square, up/down, anthracite, max. 70W

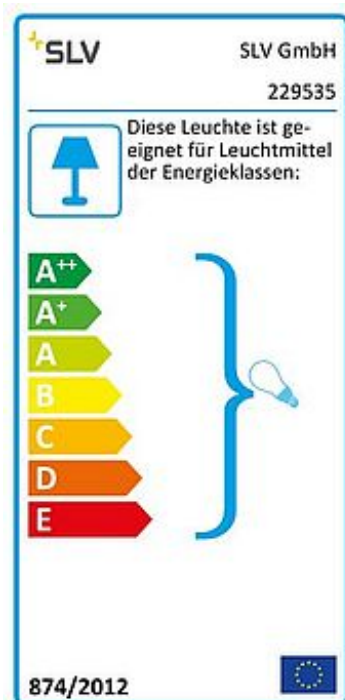

Article number	229535
Product family	Theo
Feed-in capability	No
Lampholder / Socket	GU10
Number of light sources	2
Lamp included	No
Width	7 cm
Height	22.5 cm
Depth	7.5 cm
Net weight	0.816 kg
Gross weight	0.896 kg
Voltage	230V ~50Hz
Max. wattage	35 Watt
Protection class	I
IP-rating	IP 44
Energy efficiency class	A++
Catalogue page	BIG WHITE 2019: 584
Lamp	QPAR51
Colour	anthracite
Form	square
Light distribution type 1	direct - indirect
Material	Aluminium/glass
Way of mounting	Surface mounted / Wall mounted

Articles of this series

152081	THEO, wall light, QPAR51, square, up/down, white, max. 100 W
152082	THEO, wall light, QPAR51, square, up/down, silver-grey, max. 100 W
152089	THEO, wall light, QPAR51, square, up/down, brushed aluminium, max. 100 W
229521	THEO WALL, outdoor wall light, QPAR51, IP65, square, white, max. 35W
229524	THEO WALL, outdoor wall light, QPAR51, square, silver-grey, max. 35W
229525	THEO WALL, outdoor wall light, QPAR51, square, anthracite, max. 35W
229531	THEO, outdoor wall light, QPAR51, IP44, square, up/down, white, max. 70W
229532	THEO, outdoor wall light, QPAR51, IP44, square, up/down, silver-grey, max. 70W
229536	THEO, outdoor wall light, QPAR51, IP44, square, up/down, brushed aluminium, max. 70W
229581	THEO, outdoor ceiling light, QPAR51, IP23, square, white, max. 35W
229584	THEO, outdoor ceiling light, QPAR51, IP23, square, silver-grey, max. 35W
229585	THEO, outdoor ceiling light, QPAR51, IP23, square, anthracite, max. 35W
1000327	THEO UP/DOWN, QPAR51, wall light, white, max. 2x50W
1000328	THEO UP/DOWN, QPAR51, wall light, silver-grey, max. 2x50W
1000329	THEO UP/DOWN, QPAR51, wall light, brushed aluminium, max. 2x50W
1000331	THEO UP/DOWN, QPAR51, outdoor wall light, natural aluminium, max. 2x50W, IP44
1000330	THEO UP/DOWN, wall light, QPAR51, anthracite, max. 2x50W

Wall light of the THEO series is made from aluminium and glass, which covers the lamp. Thanks to the position of the two sockets which are fitted, the mounted luminaire produces two equal but opposite cones of light (UP/DOWN). It is suitable for use outdoors thanks to its IP44 protection class. The electrical connection of the luminaire, which comes in three colours, is directly to the 230V mains supply. The THEO series contains other ceiling lights can therefore be used universally. This luminaire is suitable for lamps of energy classes: E - A++

Notes
